


## Geberit Monolith sanitary module for wall-hung WC

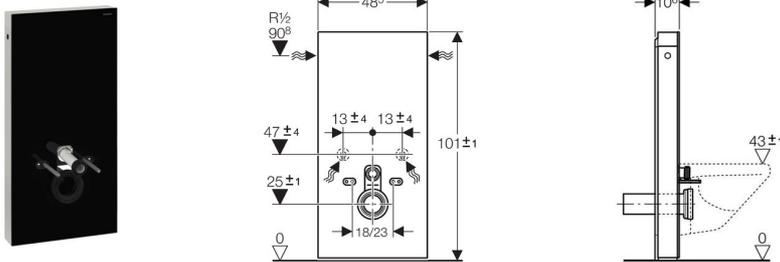

### Application purpose

- ✓ For wall-hung WC with fastening distance 18 cm or 23 cm
- ✓ For mounting on finished floors

### Characteristics

- Self-supporting
- Compensation of dimensional tolerances
- Height compensation up to 2 cm
- Dual flush
- Adjustable flushing volume
- Fully insulated against condensation
- Water supply connection at the bottom left or right

### Technical data

Flush volume factory setting	6 and 3	l
Flush range large	4.5 / 6	l

### Scope of delivery

- Water supply connection set with 2 angle stop valves R 1/2
- Flush pipe 23 x 23 cm, dia. 50/44 mm
- WC outlet pipe, HDPE, dia. 90 mm
- Adapter sleeve, dia. 90/110 mm
- 2 threaded rods M12 for ceramics fastening
- Fastening material for solid wall
- Acoustical insulation set
- Fastening material for wall-hung WC

### Article

Article no.	Colour
131.028.SI.1	white glass / aluminium
131.028.SJ.1	black glass / aluminium