


FEATURES

- COMBINATION TOILET/WASHBASIN DESIGNED TO WORK WITH STANDARD RESIDENTIAL WATER INLET & WASTE OUTLET
- Heavy 16-Gage Stainless Steel Construction
- Stainless Steel is a Recyclable Metal 
- Large Integral 'D' Shaped Bowl
- Toilet and Basin Use Separate Potable Water Inlets
- Elongated Toilet Bowl Mounted Left (-AL) or Right (-AR); Punched & Threaded for Top Mounted Toilet Seat. 1/4"-20 x 1" Screws Provided, Seat Sold Separately
- Polyethylene Inner Tank Releases 1.6 Gallons (6 Liters) per Flush
- Uses Fluid Master Toilet Flush Valves & Pushbutton
- Side Cabinet with Shelves
- Towel Rack
- Compartment for Toilet Paper
- Codes/Standards Applicable - ANSI A112.19.2
- Greenguard Gold Certified For Low Emissions



Model 8960-AL-H38
Neo-Comby - Angled Left
8\"(203) Center Set

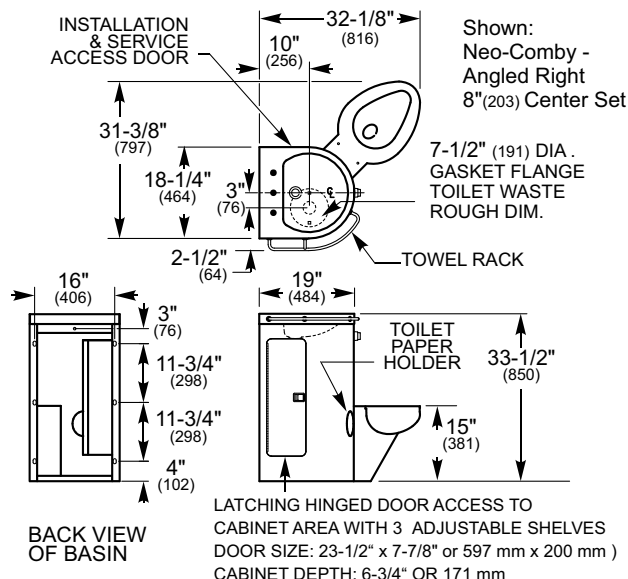

ORDERING OPTIONS

- ☐ 8960 Neo-Comby - Satin Finish Stainless Steel
Other finishes available, please contact Neo-Metro

Toilet bowl must be specified for:

- ☐ (-AL) Angled Left Configuration ☐ (-AR) Angled Right Configuration

Basin must be specified for faucet mounting on deck.
(faucets not included)

- ☐ -H1 Single Hole ☐ -H38 8\"(203mm) Centerset ☐ -H0 Less punching (will use wall mounted faucet)

- ☐ -OF Option for Basin Overflow Outlet

INSTALLATION INSTRUCTIONS ARE AVAILABLE.

Product Specification... Combination toilet and washbasin manufactured entirely of 16 gage, type 304 stainless steel. The fixture is available with an elongated toilet bowl mounted left (-AL option) or right (-AR option). The toilet bowl is punched and threaded (1/4"-20) for a top mounting elongated seat (seat sold separately). Polyethylene inner tank releases 1.6 gallons (6 liters) using Fluid Master® flush parts. Washbasin includes a large "D" shaped basin punched for faucet (faucet not included). Holes punched for faucets are 1-5/16" (33mm) diameter. Side cabinet with adjustable shelves, compartment for toilet paper and towel rack provide additional conveniences. Toilet meets ASME/ANSI guidelines as outlined in A112.19.2.

Plumbing Specification... The Neo-Comby is wall-mounted and supported on the floor. Side door allows access for installation and maintenance of interior plumbing components. 10" (254mm) rough is located 3" (76mm) offset left (-AR) or right (-AL) from center of the washbasin. The Neo-Comby features separate water inlets for the toilet and basin. Toilet uses standard residential water inlet and waste. Fill valve inlet is 1/2" NPS. Washbasin deck can be factory punched with single hole or 8" centerset (customer must specify at time of ordering). Holes punched for faucets are 1-5/16" (33mm) diameter.



APPROVAL FOR MANUFACTURE

COMPANY: _____

PROJECT NAME: _____

SIGNEE'S NAME WRITTEN CLEARLY: _____

DATE: _____

AUTHORIZED SIGNATURE: _____

 WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Stainless Steel
is Recyclable

