


The fastest hand dryers to dry hands hygienically with HEPA filtered air

The Dyson Airblade™ hand dryers are powered by the Dyson digital motor V4. Its small size and power density made our latest hand dryer technology possible.

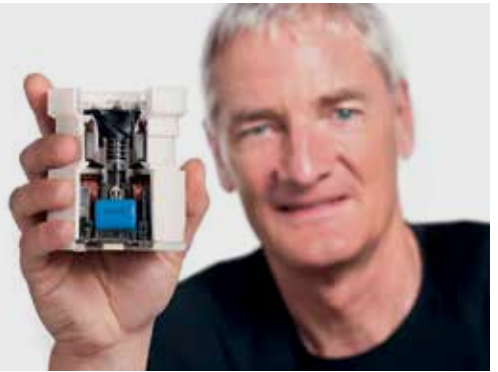

dyson airblade dB

50% quieter.¹
Acoustically re-engineered to reduce noise.

12 second dry time.²

HEPA filter removes 99.97% of bacteria as small as 0.3 microns.

Certified by NSF International.

Certified for use in food environments by HACCP International.

Tough and durable.
Robust, vandal-proof design.

Touch-free operation.

Contains antimicrobial additive to protect the product.



dyson airblade V

Concentrated Airblade™ technology.

12 second dry time.²

HEPA filter removes 99.97% of bacteria as small as 0.3 microns.

Certified by NSF International.

60% smaller than the original Dyson Airblade™ hand dryer.

ADA Compliant – just four inches deep, no recessing required.

Touch-free operation.

Contains antimicrobial additive to protect the product.



dyson airblade tap

Airblade™ hand drying technology in a tap.

14 second dry time.²

HEPA filter removes 99.97% of bacteria as small as 0.3 microns.

Certified by NSF International.

Certified for use in food environments by HACCP International.

Wash and dry hands at the tap – prevents water from dripping on the floor.

Touch-free operation.

Quick to clean.



dyson airblade

Low running costs

\$40

per year³



\$43

per year³



\$48

per year³



Expensive to run

\$1,460

per year³



\$157

per year³



Low impact on the environment

3.4g

CO₂ per dry⁴



3.6g

CO₂ per dry⁴



4.0g

CO₂ per dry⁴



High impact on the environment

13.8g

CO₂ per dry⁴



15.6g

CO₂ per dry⁴



For further information: 1-888-397-6622,
airbladeinfo@dyson.com, www.dyson.com/airblade

To purchase, contact: _____

¹ When compared to the original Dyson Airblade™ hand dryer.

² Dry time measured using Dyson test method 769 based on NSF P335 using a measurement of 0.1g residual moisture.

³ For calculations visit www.dyson.com/calcs

⁴ Calculated using PE International GaBi software and method developed with Carbon Trust based on 5 years use and dry times measured using Dyson test method 769 based on NSF P335 with a measurement of 0.1g residual moisture.