


### FEATURES

- **COMBINATION TOILET/WASHBASIN DESIGNED TO WORK WITH STANDARD RESIDENTIAL WATER INLET & WASTE OUTLET**
- **Heavy 16-Gage Stainless Steel Construction**
- **Stainless Steel is a Recyclable Metal** ♻️
- **Large Integral 'D' Shaped Bowl**
- **Toilet and Basin Use Separate Potable Water Inlets**
- **Elongated Toilet Bowl Mounted Left (-AL) or Right (-AR); Punched & Threaded for Top Mounted Toilet Seat. 1/4"-20 x 1" Screws Provided, Seat Sold Separately**
- **Polyethylene Inner Tank Releasing 1.6 Gallons (6 Liters) per Flush**
- **Uses Fluid Master® Toilet Flush Valves & Pushbutton**
- **Side Cabinet with Shelves**
- **Towel Rack**
- **Compartment for Toilet Paper**
- **Codes/Standards Applicable - ANSI A112.19.2**



**Model 8960-AL-H38**  
Neo-Comby - Angled Left  
8"(203) Center Set

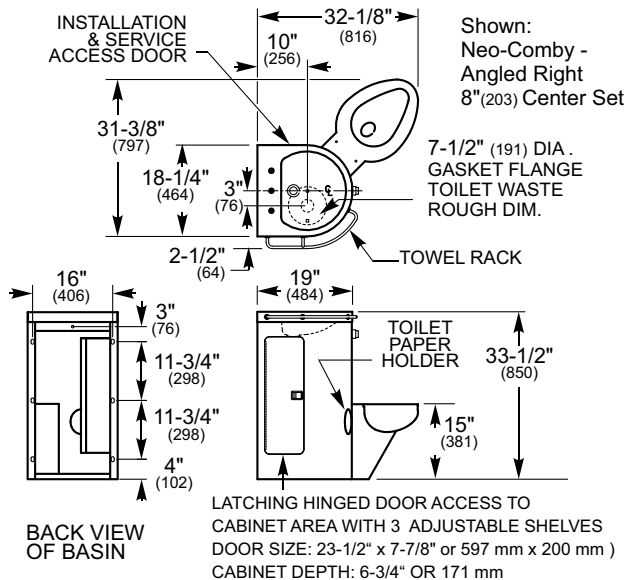

### ORDERING OPTIONS

- 8960 Neo-Comby - Satin Finish Stainless Steel  
*Other finishes available, please contact Neo-Metro*

Toilet bowl must be specified for:

- (-AL) Angled Left Configuration
- (-AR) Angled Right Configuration

Basin must be specified for faucet mounting on deck.  
**(faucets not included)**

- H1 Single Hole
- H38 8"(203mm) Centerset
- H0 Less punching (will use wall mounted faucet)

- OF Option for Basin Overflow Outlet

**INSTALLATION INSTRUCTIONS ARE AVAILABLE.**

**Product Specification...** Combination toilet and washbasin manufactured entirely of 16 gage, type 304 stainless steel. The fixture is available with an elongated toilet bowl mounted left (-AL option) or right (-AR option). The toilet bowl is punched and threaded (1/4"-20) for a top mounting elongated seat (seat sold separately). Polyethylene inner tank releases 1.6 gallons (6 liters) using Fluid Master® flush parts. Washbasin includes a large "D" shaped basin punched for faucet (faucet not included). Holes punched for faucets are 1-5/16" (33mm) diameter. Side cabinet with adjustable shelves, compartment for toilet paper and towel rack provide additional conveniences. Toilet meets ASME/ANSI guidelines as outlined in A112.19.2.

**Plumbing Specification...** The Neo-Comby is wall-mounted and supported on the floor. Side door allows access for installation and maintenance of interior plumbing components. 10" (254mm) rough is located 3" (76mm) offset left (-AR) or right (-AL) from center of the washbasin. The Neo-Comby features separate water inlets for the toilet and basin. Toilet uses standard residential water inlet and waste. Fill valve inlet is 1/2" NPS. Washbasin deck can be factory punched with single hole or 8" centerset (customer must specify at time of ordering). Holes punched for faucets are 1-5/16" (33mm) diameter.

### APPROVAL FOR MANUFACTURE

COMPANY: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

SIGNEE'S NAME WRITTEN CLEARLY: \_\_\_\_\_

DATE: \_\_\_\_\_

AUTHORIZED SIGNATURE: \_\_\_\_\_

**⚠️ WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)