




CERINE™ Toilet - Custom Exterior

FEATURES

- **Custom Decorated Toilet**
- **METAL TANK COVERED WITH CUSTOM EXTERIOR (-MBO)**
YOU DECIDE! Customer Supplies and Installs Own 3/4" (19 mm) Thick Material.
- **Heavy 16-Gage Stainless Steel Construction**
- **Satin Finish is Standard**
- **Stainless Steel is a Recyclable Metal.** ♻️
- **Works with Standard Residential Water Inlet & Waste Outlet.**
- **Elongated Bowl; Punched & Threaded for Top Mounted Toilet Seat.**
1/4"-20 x 1" Screws Provided, Seat Sold Separately
- **Polyethylene Inner Tank Releases 1.6 Gallons (6 Liters) per Flush.**
- **Uses Fluid Master® Toilet Flush Valve & Push Button.**
- **Codes/Standards Applicable - CSA  & ANSI A112.19.2**
-  **ADA Compliant Configuration Available.***


8995-MBO
Shown on Right
Satin Finish
Stainless Steel
+ Travertine
(customer must
supply & install
own material)

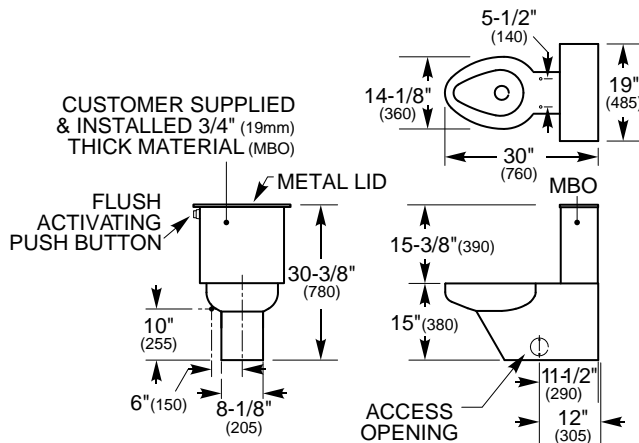


ORDERING OPTIONS

- | | |
|--|---|
| <input type="checkbox"/> 8995-MBO | CERINE Satin Finish Stainless Steel Toilet with Custom Exterior 3/4" (19 mm) Thick Material & Installation by Customer |
| <input type="checkbox"/> - ADA  | ADA Compliance Taller bowl to meet ADA requirements (* See specification sheet TS8995ADAM) |

INSTALLATION INSTRUCTIONS ARE AVAILABLE.

PRODUCT Specification . . . Cerine Toilet shall be made of 16-gage, Type 304 stainless steel. Customer is supplied with the metal bowl and tank frame to install his/her own material. The material should be 3/4" (19 mm) thick and should be water resistant. The toilet bowl is elongated and is punched and threaded (1/4"-20) for top mounting elongated toilet seat (seat not included). Trapway can pass a 2-1/8" (54 mm) ball. Toilet tank has a polyethylene inner liner and flushes with a conventional Fluid Master® float/flapper mechanism utilizing an average water consumption of 1.6 gallons (6 liter) per flush. Toilet meets ASME/ANSI guidelines as outlined in A112.19.2. Toilet also meets CSA requirements. 

 ADA compliant Cerine Toilet is available (see specification sheet TS 8995ADAM) with a taller bowl (17" or 432 mm rim height) and ADA compliant flush activating lever. Other ADA considerations may be required. Please check your local ADA regulations.

PLUMBING Specification . . . Toilet uses standard residential water inlet and waste. Fill valve inlet is 1/2" NPS. Wall inlet location is recommended at 6" (150 mm) from the center and 10" (255 mm) from finished floor. On-floor waste outlet to be located 12" (305 mm) from finished wall. Access via removable side panels.

Approved for Manufacturing

| | | | | |
|---------|--------------|----------------------|----------------------|------|
| Company | Project Name | Authorized Signature | Name Written Clearly | Date |
|---------|--------------|----------------------|----------------------|------|

Neo-Metro assumes no responsibility for use of void or suspended data. All dimensions are nominal and subject to manufacturer change without notice. © 2005 NEO-METRO®, A Division of Acorn Engineering Company. Please visit www.neo-metro.com for most current specifications.

TOLL FREE 800-591-9050 • WEB SITE www.neo-metro.com

NEO-METRO® • P.O. Box 3527 • City of Industry, CA 91744 U.S.A. • Local Phone 626-855-4854 • Fax 626-937-4725

TS 8995M
PAGE 1 OF 1

L1000953 (9/1/05)